


The WBT Patented locking mechanism provides maximum contact pressure and prevents accidental disconnection. Please take a moment to examine the connector you have purchased. Practice loosening and tightening before installation.


Step 1

Loosen barrel of the male connector.

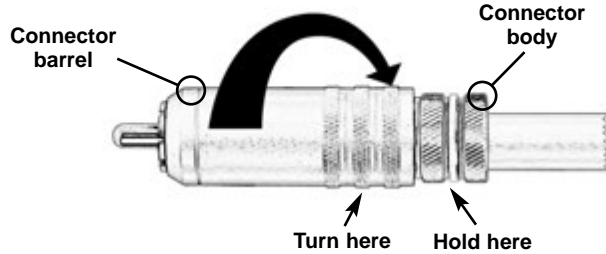

Step 2


Insert the connector into the socket.

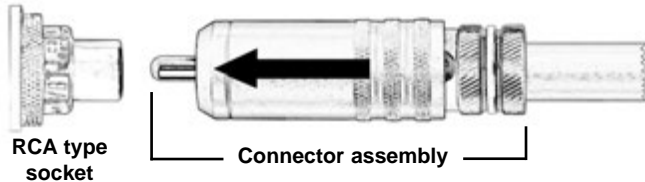

Step 3

Hold the connector body (gold with colored band) and tighten the barrel.

WARNING: To prevent damage to cable and/or socket, turn barrel only, do not allow connector body to turn!
Do not over tighten!

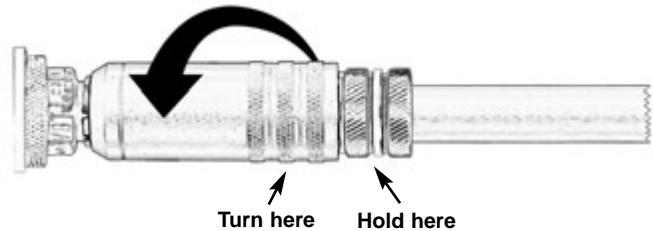

REMEMBER TO REVERSE ABOVE STEPS WHEN REMOVING THE CONNECTORS.

Failure to properly unlock the connector may result in equipment damage!