



USER GUIDES

A1 15th Anniversary QUICK GUIDE

Instructions

Please read the following instructions carefully before setting up the Aurender Music Player.

- Be careful not to drop the device to avoid internal damage.
- Do not disassemble the device.
- Keep magnetic materials away from Aurender to prevent any damage to data.
- Do not expose device to oil, dust, water, high humidity, or smoke.
- Keep ventilation openings free from obstruction.
- When cleaning, use only a soft cloth. Keep out of contact with water or other liquids.
- All servicing must be performed by a qualified representative, or the warranty will be voided.
- Unplug power cord during severe lightning storms or when unused for a long period of time.
- Unplug the device from the outlet only after completely turning off the unit.
- Always turn the power off before connecting or disconnecting any cables.
- Please note that hard drives can break down.

It is important to backup your music collection periodically to a separate memory device. In the event of drive failure, Aurender is not responsible for any loss of data. The drive manufacturer will only replace faulty drives under warranty and will not compensate for any loss of data.

Positioning


- Place your device on a flat, horizontal, and stable surface.
- Keep away from heat sources, such as radiators.
- Allow space around the device for ventilation.
- Do not place inside an enclosed cabinet.



The source, where music begins.



- A1
- Rotary BLE Remote Control
- IR Remote Control
- Power cable

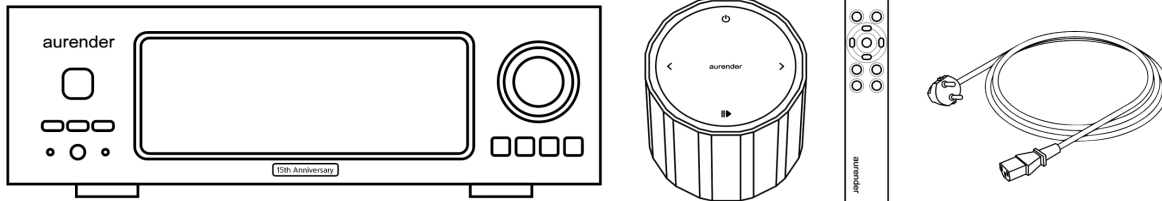

Front Panel



1. Input selection

Press the button to toggle input A1 – BT – ARC – Coaxial – Optical – AES/EBU-I2S-USB

2. IR Receive window

4. LCD display

5. Volume Knob

6. ON/OFF/Standby

In the default mode, pressing will power the unit on and completely off. In the Standby mode, pressing the front panel button will put the unit into standby, and the unit will turn on instantly. In standby mode, to turn the unit completely, press the button once so that it shows the display and press the button again so that it turns off. Flashing will stop when the unit is off.

7. 3.5mm headphone output

8. 6.3mm headphone output

9. 4.4mm balanced headphone output

10. Display Menu button

Press to cycle through 3 display options: Song Information, Playlist and Aurender IP. Songs from playlists may be selected using the four buttons on the right side of the front panel display. Use buttons 11 and 13 to scroll between playlists and button 12 to select a playlist. After the playlist is selected, press button 12 again to start playback. Once the playlist is selected, buttons 11 and 13 can be used to select songs within the selected playlist.


11. Play Previous button

Press to skip to the previous track.

13. Play Next button

Press to skip to the next track

Rear Panel

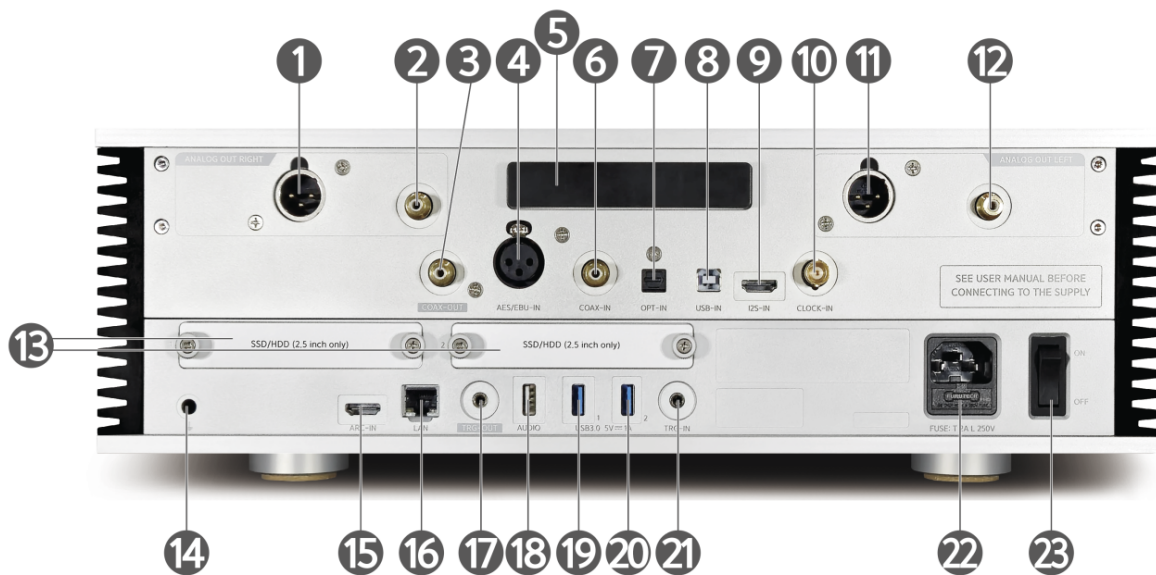


2. Analog Audio Output – RCA Right
3. Digital Audio Output – Coaxial SPDIF
4. Digital Audio Input – AES/EBU
5. Bluetooth Antenna
6. Digital Audio Input – Coaxial SPDIF
7. Digital Audio Input – Optical SPDIF
8. Digital Audio Input – USB Audio
9. Digital Audio Input – I2S
10. 10Mhz Digital Clock Input
11. Analog Audio Output – XLR Left
12. Analog Audio Output – RCA Left
13. 2.5" SSD Slots (2EA)
14. GND
15. TV ARC Input
16. 1Gbps LAN port
17. 12V Trigger Output
18. USB Audio 2.0 Output



21. 12V Trigger Input

22. AC Inlet

23. AC Power Switch

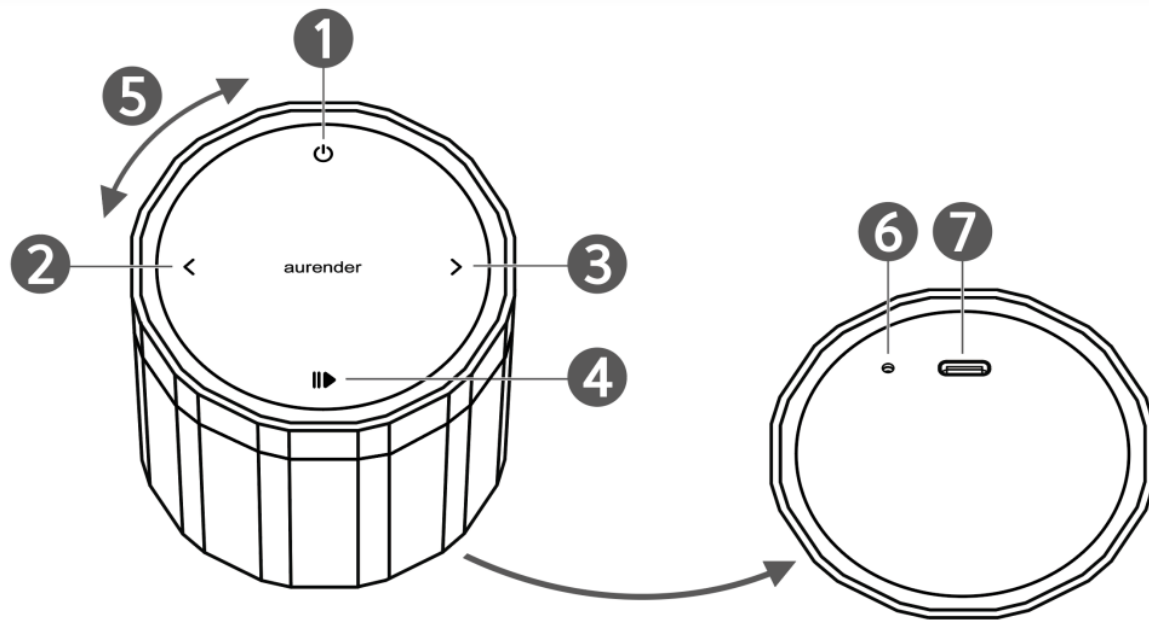

1. Power ON/OFF

2. Play Previous

3. Play Next

4. Play/Pause

5. Volume Control


6. LED for Charging Status

7. USB-C Battery Charging Connector

1. Turn on A1.
2. Press ③ (Play Next) for more than 8 seconds.
3. LED on remote will start blinking in pairing mode.
4. If LED stops blinking, it's done.
(BLE remote will be shipped already paired mode with A1.)

Charging BLE Remote Control

1. Connect USB-C cable to ⑦.
2. ⑥ hole will show RED light during charging.
3. ⑥ hole's RED light will be turned off when charging done.

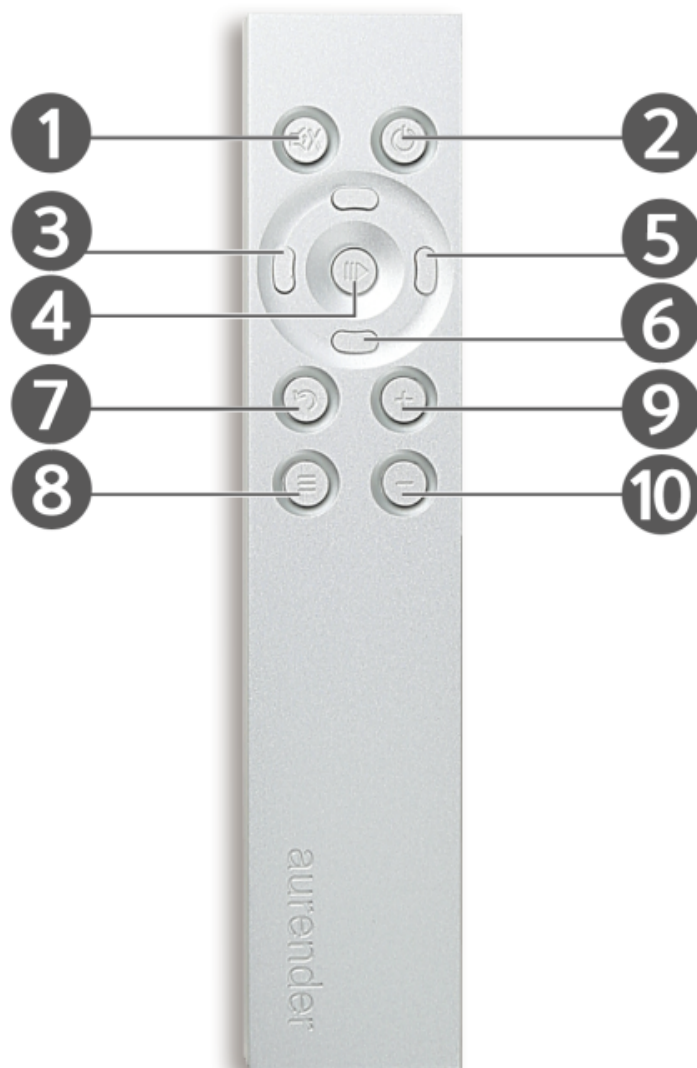

1. Mute

2. Power ON/OFF

3. Play Previous

4. Play / Pause

5. Play Next


8. Display Menu (toggle)

9. Volume Up


10. Volume Down

Connection

Connection to amplifier and router

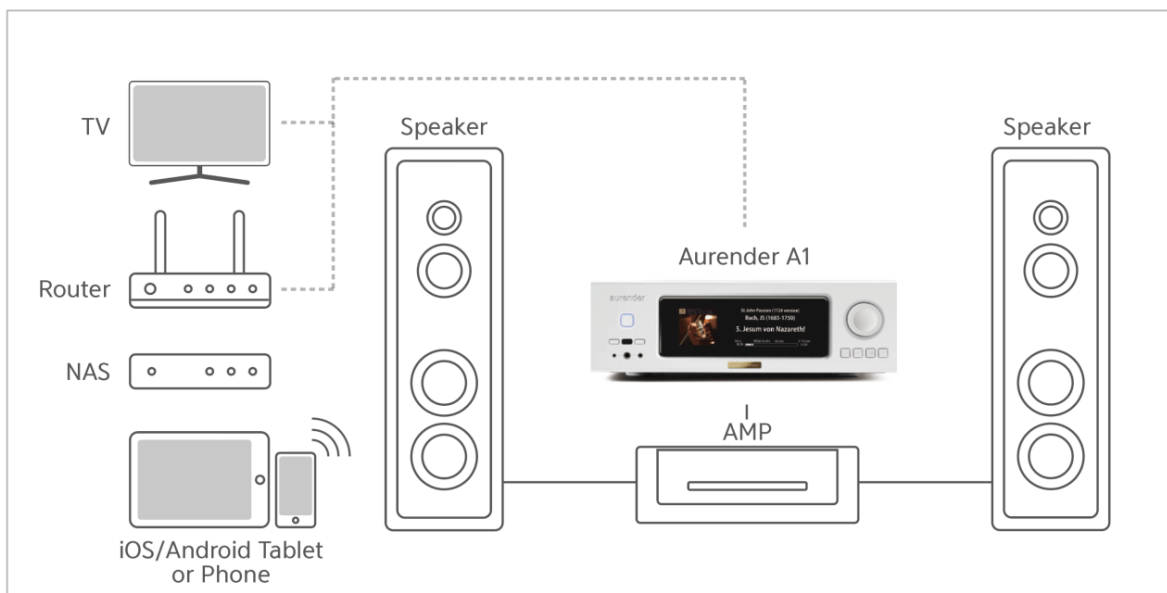

1. Check that your TV has HDMI ARC (Audio Return Channel) and connect the A1's ARC port with this input using HDMI 1.4 or newer cable.
2. Connect main power to your A1 unit and power it ON.
3. Power ON your TV, enable HDMI/ARC audio input from TV side. Make sure to setup audio output to PCM.
4. A1 will now be operated from your TV via CEC commands from TV. This will allow you to use you TV-remote to adjust volume of the A1 and also the A1 will power ON and OFF together with your TV.
5. A1 will on/off with TV only in ARC input mode.

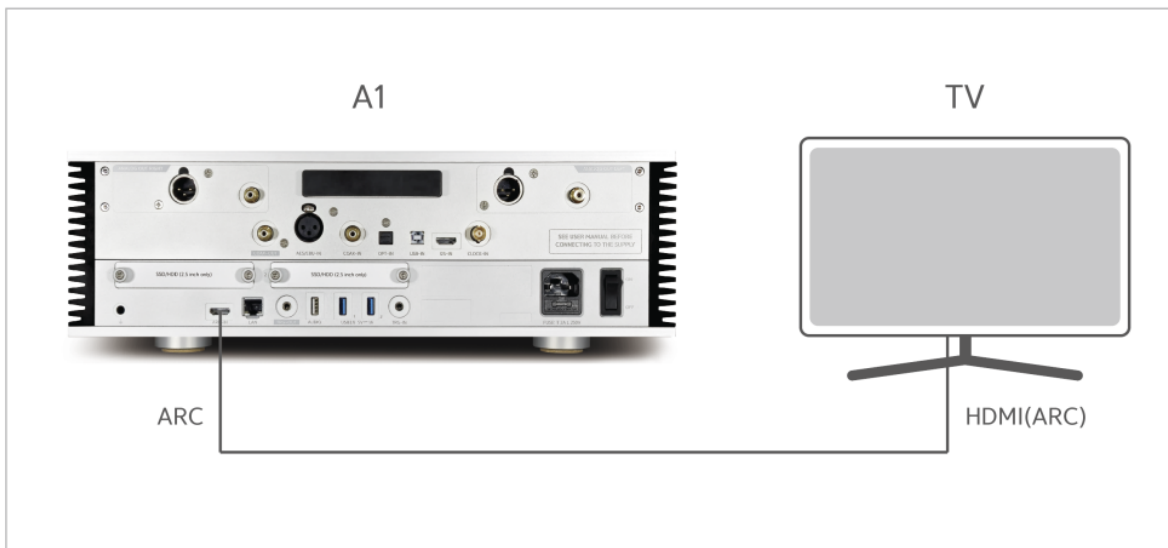

Connect A1 thru Bluetooth

1. Please change input to "Bluetooth" mode by pressing IR remote button #7 (input selection) or press #1 button (input selection) on the front panel.
2. Press "Menu" key (#10) on the front panel , or "Menu" button (#8) on the IR remote control.



aurender

The source, where music begins.



4. Please turn on BT on your phone and search for "A1", then select it.
5. After pairing successful, the below display will come out when playback music.



Streaming audio playback

Google Cast playback

1. Make sure your playback device is same network as your A1.
2. From any Google Cast supported APP, you can find the Google Cast symbol, if it is in the same network as your A1 system. Simply press the logo and choose A1.



3. Choose a TIDAL connect-enabled device (e.g. A1).



Spotify Connect

1. Use your phone, tablet or computer as a remote control for Spotify
Go to www.spotify.com/connect to learn how
2. The Spotify Software is subject to third party licenses found here:
www.spotify.com/connect/third-party-licenses



Aurender HQ : OBIZ Tower 1612, 126, Beolmal-ro, Dongan-gu, Anyang-si,
Gyeonggi-do, 14057, South Korea

Aurender America Inc : 20381 Lake Forest Drive, STE B-3 , Lake Forest,
California 92630, USA

Aurender Europe SL: Kañueta Bidea 20 D, 20018 San Sebastian, Spain

Copyright © Aurender

Aurender is a registered trademark of Aurender Inc.

